(54) Title: DEVICE FOR SCANNING AN INFORMATION CARRIER, METHOD OF MANUFACTURING, AND INFORMA-
TION CARRIER
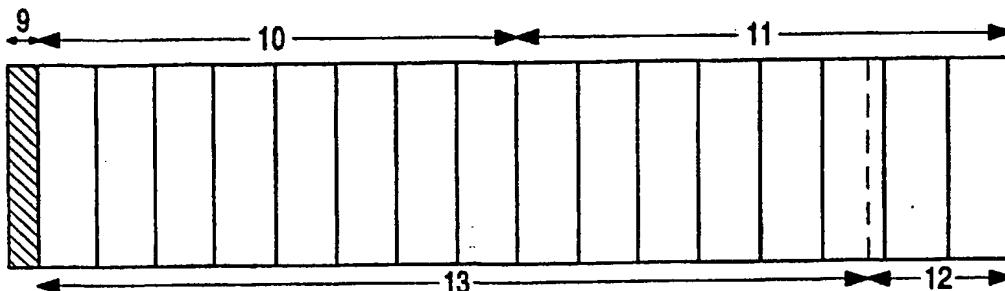
(57) Abstract: A device for reading an information carrier (1), which information carrier carries identification information (10, 11)
and user information (7, 8), which identification information (10, 11) is arranged so as to be spread over the information carrier and
which information comprises data (7, 13) and parities (8, 12). The device includes read means (42, 34) for reading the information
from the information carrier and error correction means (45) for correcting errors in the information. The device further includes
organization means (46) for organizing the information in such a way that both the identification information and the user information
can be processed by the error correction means (45). The invention further relates to a method of manufacturing and to an information
carrier (1).

Device for scanning an information carrier, method of manufacturing, and information carrier.

The invention relates to a device for scanning an information carrier, which information carrier carries identification information and user information, the identification information being spread over the information carrier and the information including data and parities, which device includes read means for reading the information present on the

5   information carrier, the device including error correction means for the correction of errors in the information.

The invention further relates to a method of manufacturing an information carrier, the method comprising the following steps: a. receiving identification information, b. calculating parities on the basis of the identification information, c. adding the parities to the

10   identification information, d. outputting the identification information and parities, e. providing the information carrier with the identification information and parities.

The invention further relates to an information carrier carrying identification information, the identification information being arranged so as to be spread over the information carrier.

15

A device of the type defined in the opening paragraph is known, inter alia from US 4,364,081. Said document discloses an apparatus for processing information in the form of a digital video signal. The signal is comprised of actual video signals and

20   identification signals. The identification signals may specify for example the track number, the frame number, the field number or the line number of the video signal.

The video signals and the identification signals may be generated for example by reading an information carrier, for example a rewritable information carrier, such as a CD-RW, a DVD-RW, or a DVR information carrier. Hereinafter, the information

25   corresponding to video signals on such an information carrier will be referred to as user information and the information corresponding the identification signals on such an information carrier will be referred to as identification information. This identification information may include address information as well as disc information, both stored in for example address information areas. In the case of video signals this address information may

for example specify the position of the video information in each field. The disc information may relate to a variety of information carrier parameters.

5   Both the identification information and the user information should be protected from, for example, scratches and dirt present on the information carrier. For this purpose, parities are added to the information. By means of these parities these errors can be corrected. Since the invention relates to the error-correction processes as such and since error correction by the addition of parities is generally known to one skilled in the art, reference is made to

10   US 4,413, 340 (PHQ 80.009) for an example of an error correction process. Said document discloses the process used for error correction of the Digital Audio Compact Disc.

As stated hereinbefore, a rewritable information carrier carries a plurality of different types of data, for example the identification information and the user information. Parities are added to each type of data in order to allow error correction. This correction is a computation-intensive and costly operation in terms of IC area.

15

It is an object of the invention to realize a device in which errors on an information carrier to be scanned are corrected in an efficient manner by means of an error correction code.

20

To this end, according to the invention, a device for scanning an information carrier of the type defined in the opening paragraph is characterized in that the device further includes organizing means for organizing the information in such a manner that both the

25   identification information and the user information can be processed by the error correction means.

By thus organizing the information it is possible to use the same hardware for the correction of errors present in the different types of information. This simplifies the device because only one type of error correction means has to be included, which has a

30   positive effect on the production cost of the device.

The invention is based inter alia on the recognition of the fact that, although the different types of data have different formats, the same error correction means can be used for the correction of errors present in the data by organizing these different types of data, which in point of fact means that blocks of identification information and blocks of user

information of the same magnitude are generated, said identification information consisting of comparatively small items of information which, by virtue of their nature, are stored in such a way that they spread over the information carrier.

5   In accordance with a second aspect of the invention a device of the type defined in the opening paragraph is characterized, according to the invention, in that the identification information comprises permanent information and in that the user information comprises rewritable information.

The permanent information is, for example, information already present on a rewritable optical information carrier, such as a CD-RW, a DVD-RW or a DVR information

10   carrier. This information may include, for example, address information and disc parameters. The rewritable information is, for example, if which can be stored on these rewritable optical information carriers by the end user.

In accordance with another aspect of the invention a device of the type defined in the opening paragraph is characterized, according to the invention, in that the permanent

15   information comprises address information and disc information.

In said address information the permanent information may include address information and disc information. The address information then comprises, for example, information about the track numbers and sector numbers. The disc information then comprises a large number of information carrier parameters.

20   In accordance with a further aspect of the invention a device of the type defined in the opening paragraph is characterized, according to the invention, in that the organization means further include addition means for adding dummy bytes of predetermined value to the identification information.

This device has the advantage that it is thus nearly always possible to give the

25   different types of data the appropriate format in an efficient manner so as to allow a faster error correction to be achieved. This can be useful in the case that the magnitude of an identification information block is not a submultiple of the magnitude of a user information block. At the instant that a given type of data cannot be given the desired format with only the rewritable information and the permanent information, dummy bytes are added in order to

30   obtain said desired format. Since said addition of the dummy bytes is effected in the device for scanning the information carrier this addition does not result in a lower data capacity (i.e. the capacity for rewritable information) on the information carrier. In order to enable the data to be corrected appropriately with the aid of the error correction means it is obvious that during the computation of the parities associated with the data (this is effected before the data

is written onto the information carrier) the value of these dummy bites must be known so as to allow the correct parities to be computed. This will be evident to this skilled in the art of error correction techniques. Only in this way is it possible to calculate the parities which enable error correction after read-out and demodulation of the data.

5   A further embodiment is characterized in that the device further includes write means.

By including in the device, in addition to read means, write means for the formation of optically readable marks on an information carrier of a recordable type, the device can perform read functions as well as recording functions.

10   A further embodiment is characterized in that the organization means are further adapted to collect the identification information by reading the address information areas of a predetermined number of tracks and subsequently organizing the address information thus read.

A further embodiment is characterized in that the predetermined number of

15   tracks is two, each track including eight address information areas, each address information area comprising 15 bytes of address information, and in that the addition means are adapted to add eight dummy bytes of non-zero value to the identification information, particularly the value FF in hexadecimal notation.

The choice of the predetermined value of the dummy bytes is not arbitrary. By

20   giving the dummy bytes a non-zero value (in the present case the value FF in hexadecimal notation) it is prevented that the parities to be calculated all assume the value zero in the case that the Disc Info comprises only zeros. Indeed, in the case that both the dummy bytes and the Disc Info comprise only zeros this will result in all parities having the value zero when the parities are calculated.

25   The invention further relates to a method of manufacturing, which is characterized in that the identification information is arranged so as to be spread over the information carrier.

The invention further relates to an information carrier, which is characterized in that the identification information comprises parities calculated on the basis of the

30   identification information.

These as well as further aspects of the invention will become apparent from and will be elucidated by means of the following description of the embodiments with reference to the accompanying drawings, in which

Figure 1 diagrammatically shows a rewritable information carrier,

5   Figure 2 shows an example of the structure of a data block with parities of rewritable data on a so-called DVR information carrier,

Figure 3 shows an example of the structure of a header block on a DVR information carrier,

Figure 4 diagrammatically shows a device for scanning an information carrier,

10   and

Figure 5 shows an example of the organization means.

Like elements in different Figures bear identical reference numerals.

15   Figure 1 diagrammatically shows a rewritable information carrier 1, in the present case a DVR information carrier. The invention is not limited to a DVR information carrier but is can also be applied to any other information carrier such as, for example, a CD-RW or a DVD-RW. The information carrier 1 has a recording area 2 having an inner diameter 3 and an outer diameter 4. The recording are 2 consists of tracks (not shown in

20   Figure 1), in the present case with a land/groove recording, which are intersected by address information areas 5. The starting points of the address information areas are radially aligned along the radial lines 6. This layout of the information carrier serves to illustrate the invention.

As stated, the address information areas comprise information relating to a

25   multitude of information carrier parameters. By way of example the following disc parameters are mentioned: disc category, version number, disc size, maximum transfer rate, the number of recording layers, the type of recording layer (for example rewritable) and recording speed.

Figure 2 shows an example of the structure of a data block with parities of

30   rewritable data on a so-called DVR information carrier. The data block 7 comprises 216 bytes of data, the data in the data block being protected by a Reed Solomon Code having 32 parities 8. The total length is consequently 248 bytes or 248 symbols. In the present case, one symbol has a size of a one byte. This data block is obtained by reading the rewritable

information on the DVR information carrier. In the present case, the size of one block is 248 bytes.

Figure 3 shows an example of the structure of a header block on a DVR information carrier. In the present example, the header block comprises disc information (see

5   51 in Figure 5). In this case the header block does not include address information (see 50 in Figure 5). As a result of this, every header block generated is identical. Each address information area 5 of Figure 1 includes a header with 15 bytes of Disc Info. Thus, one revolution includes 8 headers having 120 bytes in total. The first Disc Info block 10 is obtained by reading the 8 headers in one revolution and combining them. The second Disc

10   Info block 11 is obtained by reading the 8 headers in the next revolution and combining them. This second Disc Info block 11 includes the 32 bytes of parities 12. The data 13 thus comprises the first Disc Info block 10 and most part of the second Disc Info block 11. In order to allow the two Disc Info blocks comprising 240 bytes in total with the same error correction code the first 8 bytes, represented by the dummy block 9, are added by defining

15   them at FF in hexadecimal notation in the decoder (or in the organization means 46, see Figure 4). This means that these bytes are not on the disc. In this way, both the header information and the rewritable information can be corrected by means of the same hardware. Thus, the total header block, just like the data block, comprises 120 + 120 + 8 = 248 bytes. This standard header block is referred to as a frame. As stated, the header blocks include a

20   multitude of disc parameters. Since these parameters relate to one and the same information carrier each header block has the same content. In the present example the header block is generated by reading two successive groove tracks or two successive land tracks with address information areas. These address information areas may be provided all over the information carrier but their presence may also be restricted to the so-termed lead-in zone and/or the lead-

25   out zone.

It will be evident that both Figure 2 and Figure 3 show the logic structures of the data and header blocks and not their physical structures because, for example, the Disc Info is present in the headers spread over the information carrier.

Figure 4 diagrammatically shows a device for scanning an information carrier,

30   for example the DVR information carrier as shown in Figure 1. The device has drive means 26 for rotating the information carrier 1 and a read head 27 for reading the tracks on the information carrier. The read head 27 comprises an optical system of a known type intended for generating a light spot 28 focused on a track of the information carrier by means of a light beam 29 guided by optical elements such as a collimator lens 39, for collimating the light

beam, and an objective lens 40, for focusing the light beam. This light beam 29 is produced

by a radiation source 41, for example an infrared laser diode having a wavelength of 780 nm

and an optical power of 3 mW. The read head 27 further includes an actuator adapted to

focus the light beam 29 onto the information carrier and a tracking actuator 30 for the fine

5   positioning of the light spot 28 in a radial direction in the center of the track. In addition,

following the track with the laser beam can also be achieved by varying the position of the

objective lens 40. After being reflected from the information carrier the light beam 29 is

detected by a detector 42 of a known type, for example a quadrant detector, which generates

detector signals 31 including a read signal, a tracking error signal, a focus error signal, a

10   synchronizing signal and a lock-in signal. For this purpose, use can be made of, for example,

a beam splitting cube 43, a polarizing beam splitting cube, a pellicle or a retarder.

        The device includes tracking means 32 coupled to the read head 27 to receive

the tracking error signal from the read head 27 and to control the tracking actuator 30. During

reading the read means 34 receive the read signal. The read signal 44 is subsequently

15   transferred to and received by the organization means 46. In these organization means 46 the

read signal is demodulated. The method of demodulating obviously depends on the method

by which the data has been modulated (for a more detailed description of this process

reference is made to the example as shown in Figure 5). It is possible that the rewritable

information has been modulated in another manner than the permanent information present in

20   the headers, i.e. the rewritable information for example with a so-termed (1,7) RLL code and

the permanent information for example with a (2,7) RLL code. The device further includes an

address detector 35, for detecting the addresses and the Disc Info present in the header fields,

and positioning means 36 for the coarse positioning of the read head 27 in a radial direction

of the track. On the basis of the signals 47 obtained from the address detector 35 the

25   organization means 46 can generate the data blocks and header blocks as shown in Figure 2

and Figure 3 and can supply these blocks to the error correction means 45, thus enabling both

the permanent information and the rewritable information present on the DVR information

carrier to be corrected by the same error correction means 45. In order the enable the data

blocks and the header blocks to be generated from the demodulated read signal the

30   organization means should store the Disc Info bytes of two revolutions and should combine

them with 8 dummy bytes so as to form a header block (or Disc Info block) of 248 bytes.

Said addition of the dummy bytes is effected by addition means. These addition means form

part of the organization means 46. Thus, the dummy bytes are added to the header block after

the demodulation of the read signal. After error correction in the error correction means 45 the error-corrected demodulated signal 48 is available at the output for further processing.

The device further includes a system control unit 37 adapted to receive commands from a controlling computer system or from a user and to control the device by
5   means of control lines 38, for example a system bus connected to the drive means 26, the positioning means 36, the address detector 35, the tracking means 32 and the read means 34. For this purpose, the system control unit 37 includes a control circuit, for example a microprocessor, a program memory and control gates for carrying out the processes as described hereinafter. The system control unit 37 may also be implemented in a state
10   machine in logic circuits.

In another embodiment the device may include, in addition to the read means 34, write means for forming optically readable marks on an information carrier of a recordable type, which enables the device to perform both read functions and recording functions.

15   Figure 5 shows an example of the organization means. As stated, the organization means 46 take care that the various ECC blocks, i.e. the header blocks and the data blocks, are generated. In Figure 5 this is illustrated for the generation of the header blocks. The read signal 44 and the signal 47 from the address detector 35 are applied to the demodulator 49 to the control the demodulation. The demodulator demodulates the read
20   signal 44 and splits the demodulated read signal into an address data component 50 and a Disc Info component 51. The address data serves as a so-called pointer 53 for storing the Disc Info at the correct location in the memory 52. The address data inter alia includes the track number and the segment number. On the basis of this information it is possible to calculate at which position the Disc Info is to be stored (for example that the Disc Info of
25   each even track number and 0^{th} segment is to be stored at the first position of the memory 52). The signal 47 from the address detector 35 is added to the address data component 50 and the Disc Info component 51 in order to control the splitting of the demodulated read signal. The Disc Info in the Disc Info component is subsequently loaded into the memory 52. Once the entire memory has been loaded with Disc Info (and the dummy bytes 9) this
30   information can be applied to the error correction means 45.

Likewise, the data blocks associated with the rewritable information can be generated and supplied to the same error correction means 45.

Although the invention has been described with reference to the above embodiments, it is obvious that alternative embodiments may be used in order to achieve the

same goal. For example, the invention is by no means limited to the present example of data and header blocks of 248 bytes. Any length is possible for the data and header block. In addition, any arbitrary number of dummy bytes may be added to the rewritable information and/or the permanent information. Moreover, the invention is neither limited to error

5   correction processes where each symbol has the size of one byte. The error correction process to be used for the present invention is not limited to the method of error correction as described in US 4,413,340; alternatively, other known error correction processes such as the product code or the picket code may be used.

Furthermore, the invention is assumed to reside in any novel feature and/or

10   combination of features.

CLAIMS:

1.   A device for scanning an information carrier (1), which information carrier carries identification information (10, 11) and user information (7, 8), the identification information (10, 11) being spread over the information carrier and the information including data (7, 13) and parities (8, 12), which device includes read means (42, 34) for reading the

5   information present on the information carrier, the device including error correction means (45) for the correction of errors in the information, characterized in that the device further includes organization means (46) for the organization of the information in such a manner that both the identification information and the user information can be processed by the error correction means (45).

10

2.   A device as claimed in Claim 1, characterized in that the identification information (10, 11) comprises permanent information (10, 11) and in that the user information (7, 8) comprises rewritable information (7, 8).

15   3.   A device as claimed in Claim 2, characterized in that the permanent information (10, 11) comprises address information (50) and disc information (51).

4.   A device as claimed in Claim 1, characterized in that the organization means (46) further include addition means (46) for adding dummy bytes (9) of predetermined value

20   to the identification information (10, 11).

5.   A device as claimed in Claim 1, characterized in that the device further includes write means.

25   6.   A device as claimed in Claim 1, where the information carrier (1) has a pattern of substantially parallel tracks, the tracks comprising address information areas (5) and data areas (2), the address information areas (5) including the identification information, characterized in that the organization means (46) are further adapted to collect the identification information (10, 11) by reading the address information areas (5) of a

predetermined number of tracks and subsequently organizing the address information thus read.

7.   A device as claimed in Claim 6, characterized in that the predetermined number of tracks is two, each track including eight address information areas (5), each address information area comprising 15 bytes of address information, and in that the addition means (46) are adapted to add eight dummy bytes (9) of non-zero value to the identification information (10, 11), particularly the value FF in hexadecimal notation.

8.   A method of manufacturing an information carrier (1), the method comprising the following steps:
    a.   receiving identification information (10, 11),
    b.   calculating parities (12) on the basis of the identification information (10, 11),
    c.   adding the parities (12) to the identification information (10, 11),
    d.   outputting the identification information (10, 11) and parities (12),
    e.   providing the information carrier (1) with the identification information (10, 11) and parities (12), characterized in that the identification information (10, 11) is arranged so as to be spread over the information carrier (1).

9.   A method of manufacturing an information carrier (1), the method comprising the following steps:
    a.   receiving identification information (10, 11),
    b.   receiving dummy bytes (9) of predetermined value,
    c.   calculating parities (12) on the basis of the identification information (10, 11) and dummy bytes (9),
    d.   adding the parities (12) to the identification information (10, 11),
    e.   outputting the identification information (10, 11) and parities (12),
    f.   providing the information carrier (1) with the identification information (10, 11) and parities (12), characterized in that the identification information (10, 11) is arranged so as to be spread over the information carrier (1).

10.   A method as claimed in Claim 9, characterized in that the dummy bytes (9) have a non-zero value, particularly the value FF in hexadecimal notation.

An information carrier carrying identification information (10, 11), the identification information (10, 11) being arranged so as to be spread over the information carrier (1), characterized in that the identification information (10, 11) comprises parities (12) calculated on the basis of the identification information (10, 11, 13).
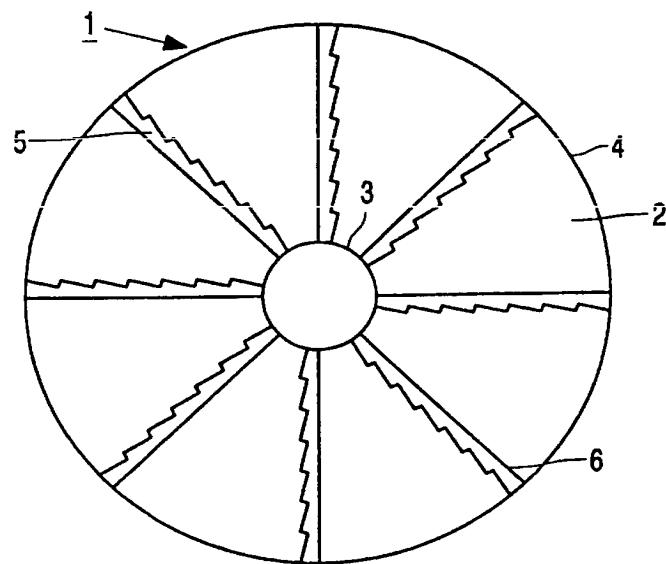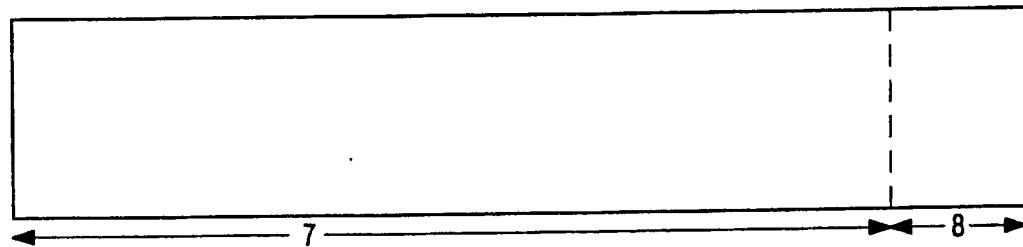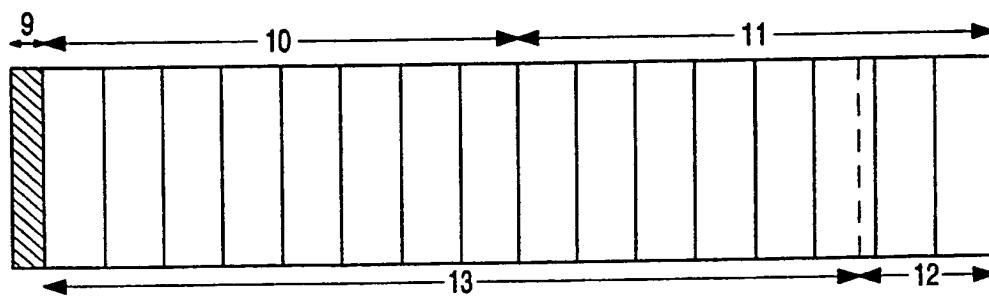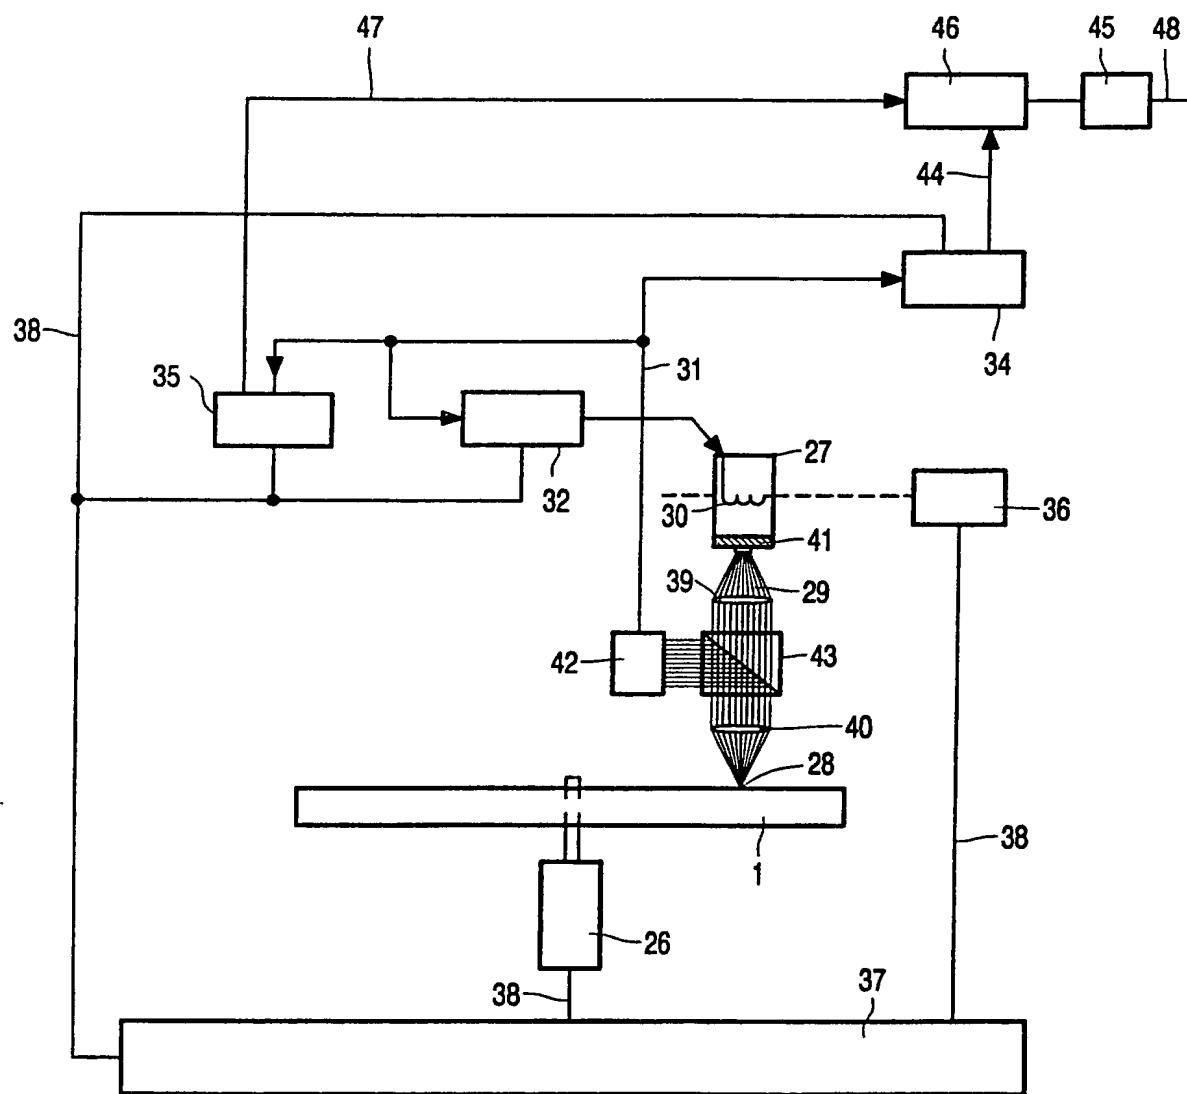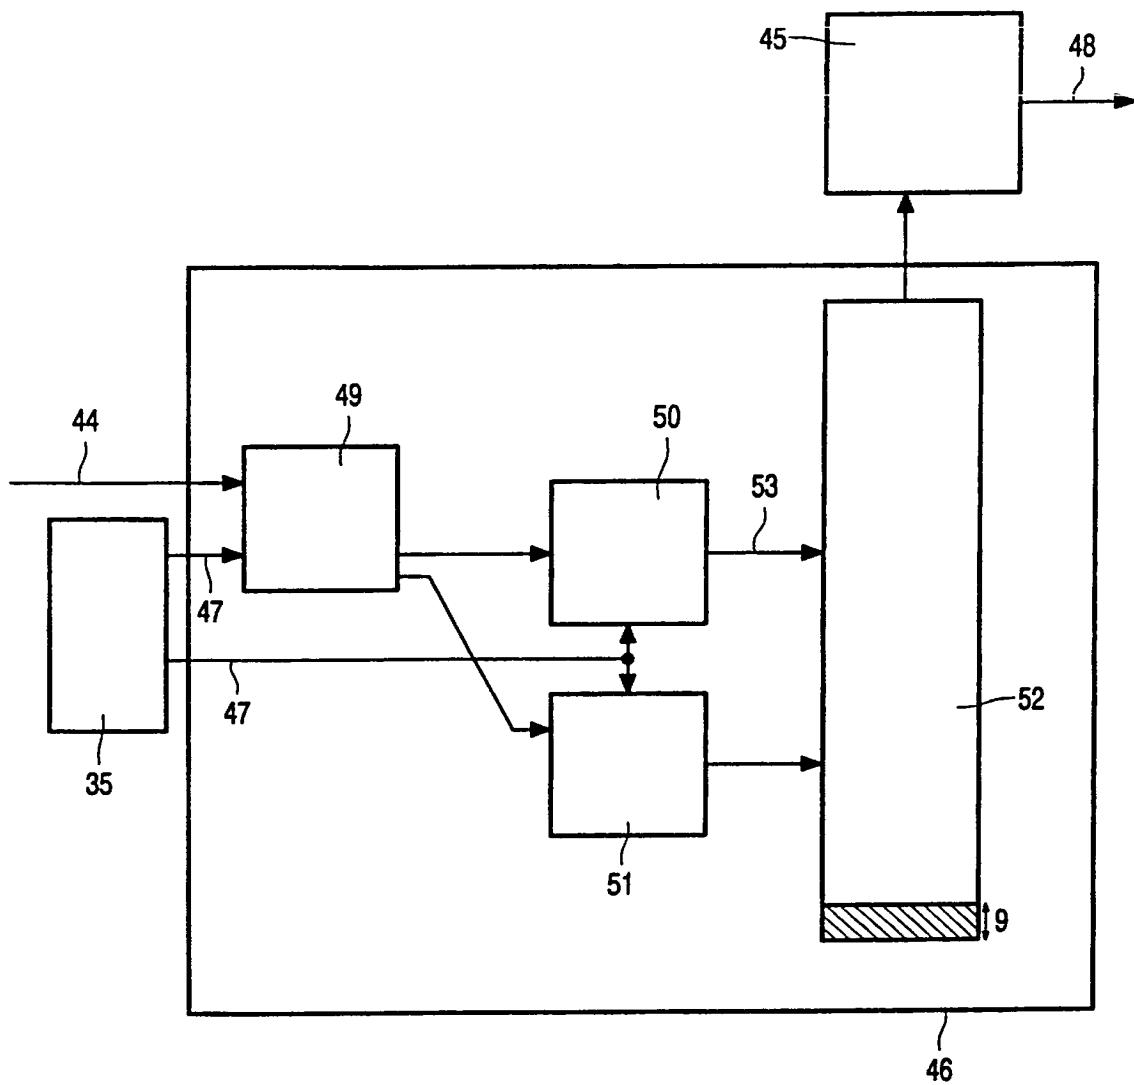
FIG. 1

FIG. 2

FIG. 3

FIG. 4

3/3

FIG. 5

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7   G11B20/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7   G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal, WPI Data, IBM-TDB, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 07, 31 March 1998 (1998-03-31) & JP 08 235793 A (INTERNATL BUSINESS MACH CORP <IBM>), 13 September 1996 (1996-09-13)	1,6
A	abstract	8
X	US 5 600 662 A (ZOOK CHRISTOPHER P) 4 February 1997 (1997-02-04) abstract; figure 7 column 2, line 14 - line 21 column 6, line 28 - line 48 claims 1-7	1

-/--

[X] Further documents are listed in the continuation of box C.   [X] Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
28 September 2000	10/10/2000

| Name and mailing address of the ISA
 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016 | Authorized officer

 Schiwy-Rausch, G |

INTERNATIONAL SEARCH REPORT

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 624 875 A (MATSUSHITA ELECTRIC IND CO LTD) 17 November 1994 (1994-11-17) abstract page 3, line 53 -page 4, line 6 claim 1; figure 1	1
X	GB 2 332 977 A (SAMSUNG ELECTRONICS CO LTD) 7 July 1999 (1999-07-07) page 3, line 1 - line 27 page 8, line 13 -page 9, line 7 page 10, line 22 -page 11, line 7	8
X,P	DATABASE WPI Section EI, Week 200018 Derwent Publications Ltd., London, GB; Class T03, AN 2000-202277 XP002148798 & JP 2000 040307 A (SONY CORP), 8 February 2000 (2000-02-08) abstract	1
A	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 06, 31 July 1995 (1995-07-31) & JP 07 073606 A (SONY CORP), 17 March 1995 (1995-03-17)	

1

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
JP 08235793	A	13-09-1996	US	5864440 A	26-01-1999
US 5600662	A	04-02-1997	US	5602857 A	11-02-1997
			US	5465260 A	07-11-1995
			US	5473620 A	05-12-1995
			US	5629949 A	13-05-1997
			EP	0729674 A	04-09-1996
			JP	9507118 T	15-07-1997
			SG	43012 A	17-10-1997
			WO	9512921 A	11-05-1995
			US	5671237 A	23-09-1997
			US	5724368 A	03-03-1998
			DE	69424877 D	13-07-2000
			EP	0729611 A	04-09-1996
			JP	9507117 T	15-07-1997
			SG	47466 A	17-04-1998
			WO	9512850 A	11-05-1995
			US	5446743 A	29-08-1995
			EP	0727066 A	21-08-1996
			JP	9507110 T	15-07-1997
			SG	50474 A	20-07-1998
			WO	9512845 A	11-05-1995
			US	5555516 A	10-09-1996
			US	5592404 A	07-01-1997
			US	5467297 A	14-11-1995
			US	5668976 A	16-09-1997
			US	6018626 A	25-01-2000
			EP	0727068 A	21-08-1996
			SG	50471 A	20-07-1998
			WO	9512849 A	11-05-1995
			US	5491701 A	13-02-1996
			US	5696775 A	09-12-1997
			EP	0720759 A	10-07-1996
			JP	9505952 T	10-06-1997
			SG	46513 A	20-02-1998
			WO	9508803 A	30-03-1995
			US	5822337 A	13-10-1998
EP 0624875	A	17-11-1994	JP	7029315 A	31-01-1995
			KR	169343 B	20-03-1999
			US	5617263 A	01-04-1997
GB 2332977	A	07-07-1999	JP	11213532 A	06-08-1999
JP 2000040307	A	08-02-2000	NONE		
JP 07073606	A	17-03-1995	EP	0640924 A	01-03-1995
			US	5721873 A	24-02-1998
			US	5592454 A	07-01-1997
			US	5812512 A	22-09-1998

Form PCT/ISA/210 (patent family annex) (July 1992)

This Page Blank (uspto)